


Tri-Met TML™

Universal holding frames

FEATURES

- Available in three stock depths
- Custom sizes available
- Easy to install
- Available in 16-gauge aluminized, galvanized and stainless steel
- Functional in either front or rear load applications
- Can be used with virtually all ASHRAE-rated filters
- Multiple stages per frame
- Optional gasketing

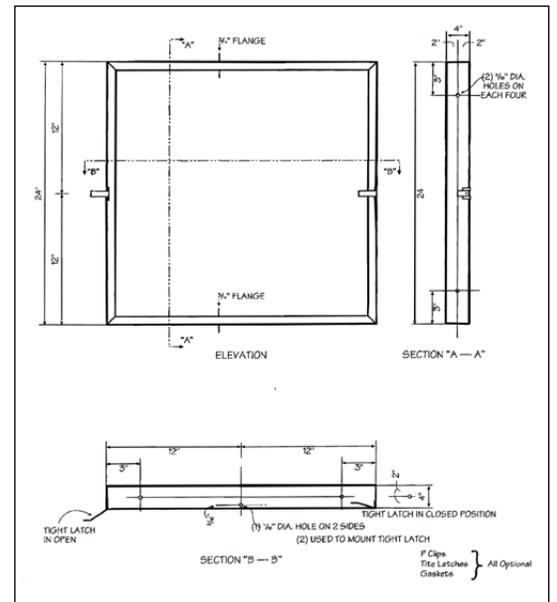

MODULAR FILTER FRAMES FOR ASHRAE-RATED PREFILTERS AND FINAL FILTERS

The Tri-Met TML™ universal holding frame is a modular filter bank system that can be utilized in new or renovation projects — such as auto roll conversions.

Tri-Met TML™ can be easily assembled by either welding, pop riveting, or using nuts and bolts through pre-drilled, self-aligning holes. In installations where Tri-Met TML™ frames are stacked more than three high, a support bar should be used.

Tri-Met TML™ frames are available in both standard and custom sizes with three standard depths (2", 3" and 4"), and also in a variety of metals — including 16-gauge galvanized, aluminized and stainless steel.

Tri-Met TML™ can be used in either upstream or downstream access applications, and are designed to hold virtually all ASHRAE-rated air filters. Multiple stages of air filters can be held in a single Tri-Met TML™ frame depending on the fastening device chosen. See the next page for more information on fastener options.


Tri-Met TML™ frames are available with optional neoprene gasketing. Tri-Dim recommends the use of gasketed frames to help reduce air bypass around filters. Tri-Dim also recommends the use of caulk between frames to eliminate air bypass.

Tri-Met TML™


Technical specification

FASTENER OPTIONS


Fastener Type	Size	Typical Applications
P-Clip	½"	½" thick filter
P-Clip	1"	1" thick prefilter or final filter with single header
P-Clip	2"	2" thick filter
P-Clip	3"	2" thick prefilter and final filter with single header
P-Clip	4"	4" thick filter
P-Clip	5"	4" thick prefilter and final filter with single header
P-Clip	6"	6" thick final filter with no or double header
P-Clip	12"	12" thick final filter with no or double header
Prefilter Clip	2"	2" prefilter to the face of a C-style final filter
Prefilter Clip	4"	4" prefilter to the face of a C-style final filter
Latch	-	Holds prefilter - thickness determined by frame depth
Spring Clip	6"	6" thick final filter
Spring Clip	12"	12" thick final filter




P-Clip



Prefilter Clip



Latch

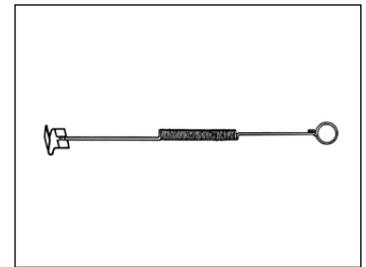

Spring Clip

Tri-Dim Filter Corporation is committed to continual product development - all descriptions, specifications and performance data are subject to change without notice. Tri-Dim products are manufactured to exacting criteria - there can be a ±5% variance in filter performance.

LOCAL REPRESENTATIVE